


RF ADMITTANCE TYPE CHUTE JAM SWITCH

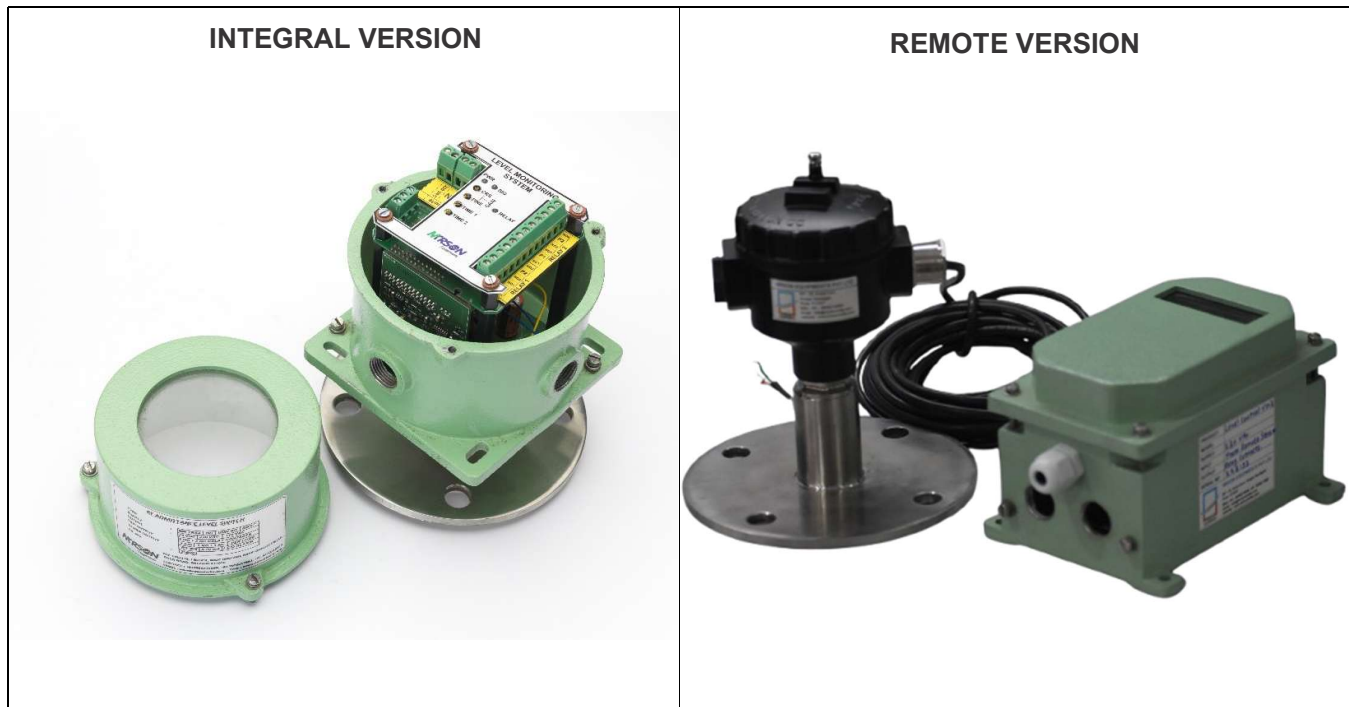

ELECTRONIC SPECIFICATIONS

SR. NO.	PARAMETER	TECHNICAL SPECIFICATION
01	PRINCIPLE	RF ADMITTANCE
02	SUPPLY	230 VAC (Please confirm if else as per Ordering Proforma)
03	OUTPUT	2 NO + 2 NC RELAY CONTACTS
04	RATING	5A AT 230 VAC.
05	AMBIENT TEMPERATURE	60 °C MAXIMUM.
06	OPERATING TEMPERATURE	SUITABLE FOR SENSING FACE/ TARGET MATERIAL
07	RELATIVE HUMIDITY	95 % MAXIMUM (NON-CONDENSING).
08	INTERNAL SETTINGS'	I. DELAY TIMER: (0-30 SEC) FOR RELAY ENERGIZE & DE-ENERGIZE TO AVOID FALSE TRIPPING DUE TO MOMENTARY DEPOSITION OF MATERIAL. II. GAIN ADJUSTMENT: WITH HELP OF MULTI TURN TRIM POT ADJUSTMENT FOR FINE AND COARSE.
09	LED INDICATIONS	PROVIDED FOR POWER, SENSING, RELAY STATUS.

MECHANICAL SPECIFICATIONS

SR. NO.	PARAMETER	TECHNICAL SPECIFICATION
01	CABLE GLAND	02 NOS 3/4TH "ET.
02	SENSOR MOC	STAINLESS STEEL.
03	FLANGE MOC	STAINLESS STEEL.
04	ENCLOSURE	CAST AL. ENCLOSURE (TO BE MOUNTED IN FIELD).
05	PROTECTION	IP65
06	MOUNTING	STANDARD DISC PROBE (FLANGE MOUNTED).
07	TYPE OF INSULATION	TEFLON.
08	COUNTER FLANGE THICKNESS	5 MM
09	COUNTER FLANGE MOC	MS/SS (CAN BE OFFERED BY VENDOR ALSO)

ORDERING PROFORMA

PROBE TYPE	
D	DISC TYPE
RD	ROD TYPE
RP	ROPE TYPE

FLANGE MOC		
SS	STAINLESS STEEL	
MS	MILD STEEL	NOT AVAILABLE IN MINIATURE DISC
O	OTHER THAN ABOVE	

MODEL	
R	REMOTE
I	INTEGRAL

TIMER	
T	WITH ON AND OFF DELAY TIMER
NT	WITHOUT TIMER

MRSON Make

MR

CJS

D

S

I

3

SS

1

T

W65

1

CHUTE JAM SWITCH

PROBE TEMPERATURE	
1	0 – 70 °C
2	0 – 150 °C
3	0 – 350 °C
4	ABOVE 350 °C

LENGTH / SIZE		
M	MINIATURE	AVAILABLE ONLY FOR DISC
S	STANDARD	
H	HEAVY DUTY	AVAILABLE ONLY FOR ROD AND ROPE TYPE
VALUE	LENGTH IN mm	

SUPPLY VOLTAGE	
1	90-270 VAC
2	110 VAC
3	230 VAC
4	110 AND 230 VAC
5	24 VDC
6	OTHER THEN ABOVE

ENCLOSURE	
W65	WEATHERPROOF-IP65
W66	WEATHERPROOF-IP66
W67	WEATHERPROOF-IP67
FP	FLAMEPROOF
DE	DIN ENCLOSURE

OUTPUT TYPE		
1	2 NO + 2 NC POTENTIAL FREE RELAY CONTACTS	
2	SOLID STATE O/P : PNP	AVAILABLE WITH SUPPLY VOLTAGE 24 VDC
3	SOLID STATE O/P : NPN	
4	NAMUR O/P	

OTHER MODELS PHOTOS



MRSON EQUIPMENTS PVT. LTD.

Registered Office:
RH 25, Kunal Icon, Pimple Saudagar, Aundh, Pune 411027.
Maharashtra. INDIA.
Contact: +91 9370149559 | +91 7620217652 | +91 8956215869
ravi@mrsonindia.com | adwait@mrsonindia.com
pushkar@mrsonindia.com | info@mrsonindia.com

Works:
Pap - 135 / 136, J Block, MIDC Bhosari,
Behind Smith House, Near Quality Circle,
Telco Road, Bhosari 411026.
Maharashtra. INDIA